

ES 200 self learning with progarm switch


STEP 1: Disconnect power to the automatic door operator.

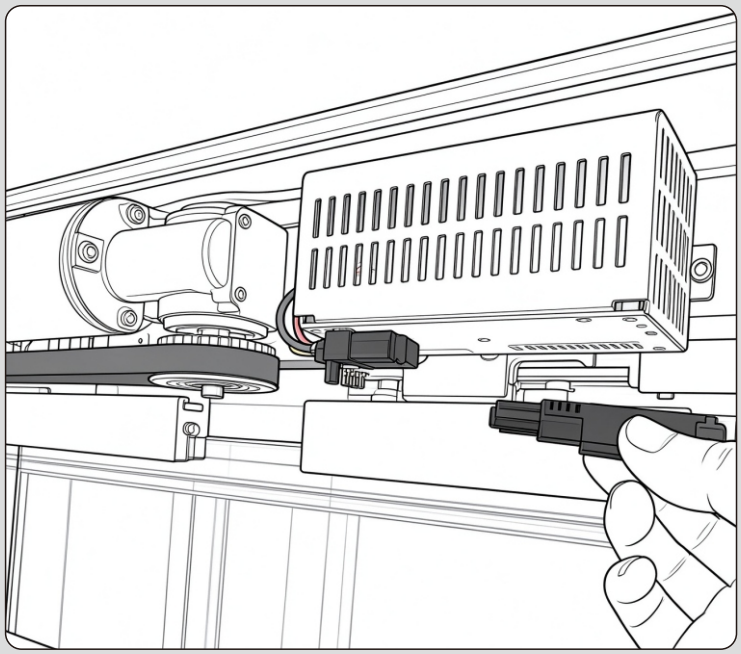


STEP 2: Set program switch to “close”.

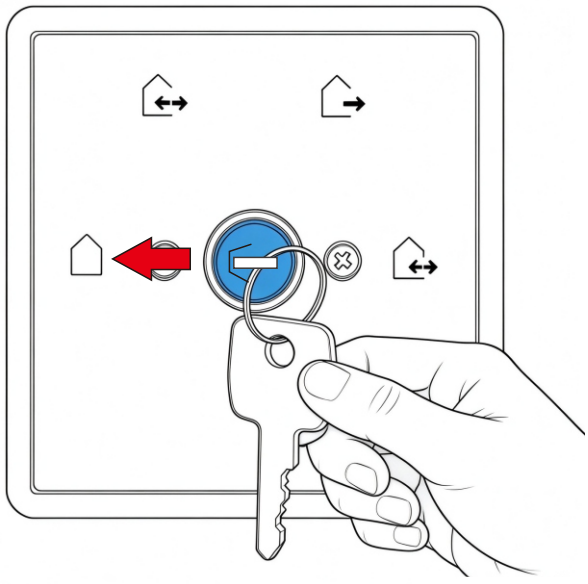


STEP 3: Manually open the moving leaf to the half-open position.

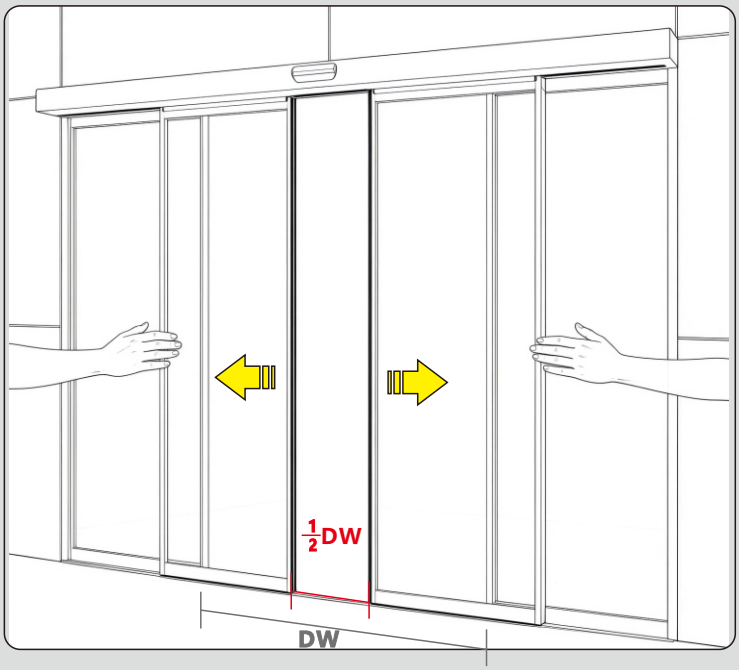


STEP 4: Connect power to the automatic door operator.

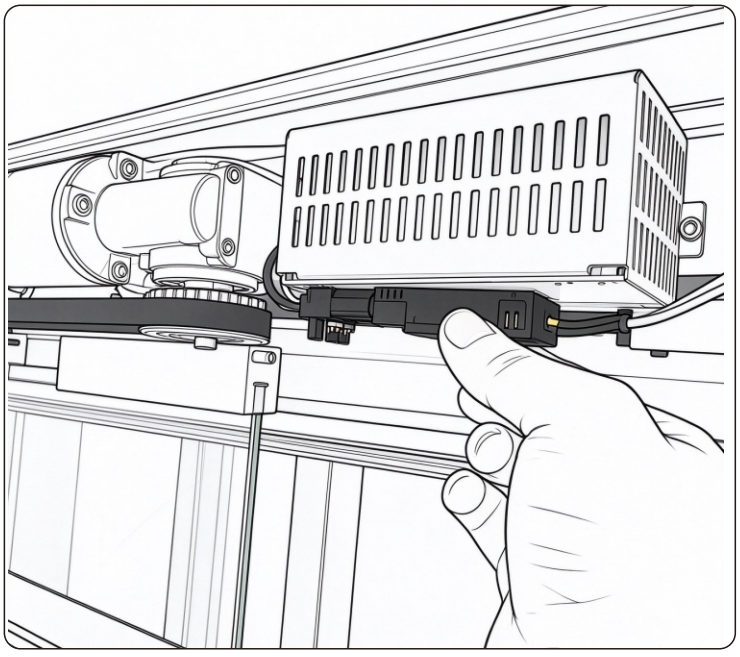


STEP 5: Wait for the automatic door to close automatically completely.

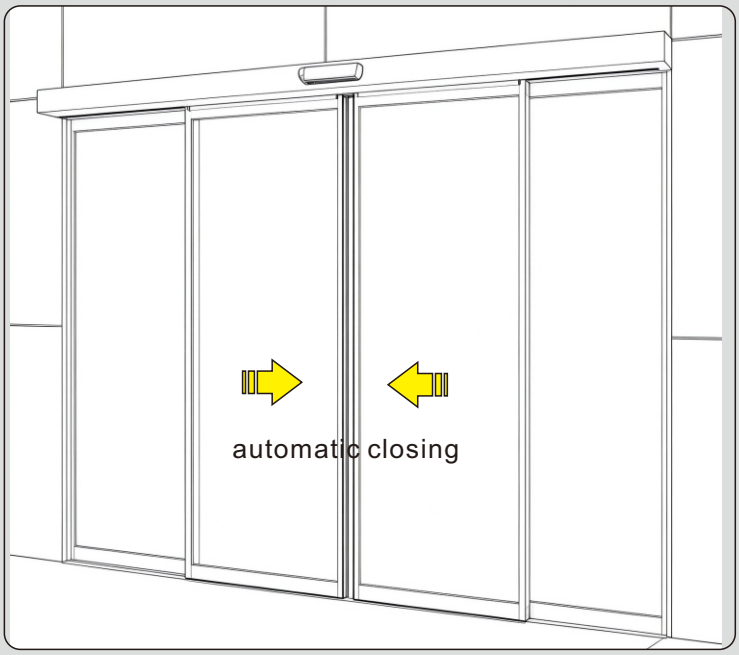

STEP 6: Press the "Serv." button and hold it for approximately 5–7 seconds. Release the button once the automatic door starts to move.

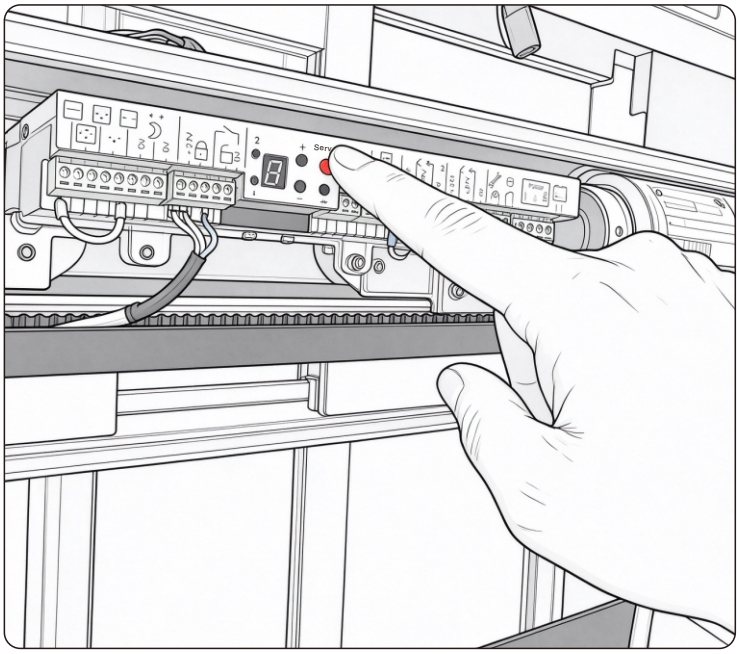

STEP 7: During the teach-in process, the automatic door will perform a slow opening movement followed by normal-speed closing. Do not touch the door at any time.

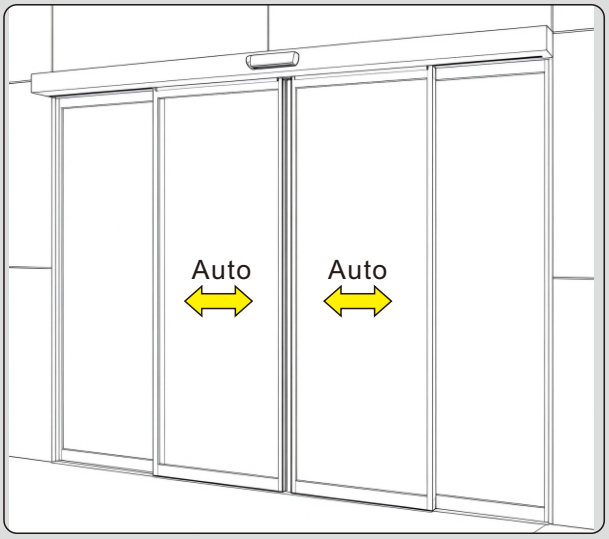

Success indicator:
The digit "8" flashes twice, and the decimal point stays on.

